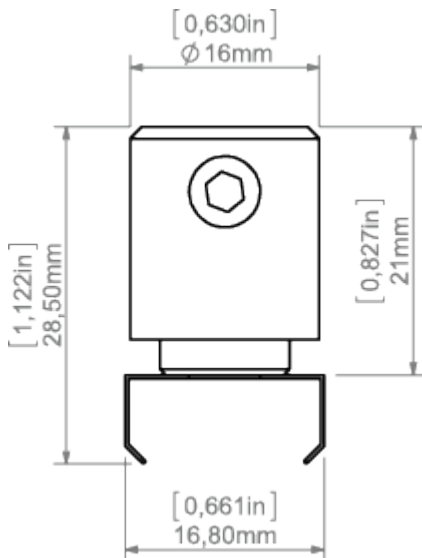


PRODUCT DESCRIPTION

Standard conductive fastener for light-weight fixtures. The extrusion is inserted into the PDS MOUNTING BRACKET. Power is supplied through a hole inside the fastener. One current pole is powered from one fastener that is equipped with a longitudinal hole for the FI-3 ROD, which acts as a power conductor

Fill empty fields


Product nr.
Fixture type
Company
Job name
Date

**TECHNICAL SPECIFICATION****TECHNICAL DRAWING**


RELATED PROFILES




45-16 Profile
Ref: B8504



MICRO-ALU Profile
Ref: B1888




TAMI Profile
Ref: B5390



PDS-4-ALU Profile
Ref: B1718




REGULOR Profile
Ref: B468+43




PDS-O Profile
Ref: B3777



PDS-4-PLUS
Profile
Ref: C1263



TAPO Profile
Ref: C1919



MICRO-PLUS
Profile
Ref: C2966

RELATED PRODUCTS


ACCESSORIES




100 PUSZ brass
chrome Rod 1 m
Ref: 42518



Brass chrome FI-3
Rod 1m
Ref: 42501



FI-3-ALU Rod
black 1 m
Ref: 42527




FI-3-ALU Rod
black 2 m
Ref: 42529




FI-3-ALU Rod
silver 1 m
Ref: 42526



FI-3-ALU Rod
silver 2 m
Ref: 42528



Steel FI-3 Rod 53
cm
Ref: 1528



Steel wire FI-1 1m
Ref: 1397