

PRODUCT DESCRIPTION

Standard conductive fastener for light-weight fixtures. Power is supplied through a hole inside the fastener. One current pole is powered from one fastener that is equipped with a longitudinal hole for the FI-3 ROD, which acts as a power conductor

Fill empty fields

Product nr.

Fixture type

Company

Job name


Date






TECHNICAL SPECIFICATION

TECHNICAL DRAWING





RELATED PROFILES



GIZA-LL profile Ref: C0758



TAMI Profile Ref: B5390



TEST-36 Profile Ref: B6639



GIZA Profile Ref: B5556

PDS-ZMG Profile

4050-W Profile

Ref: 18051

Ref: C1418





PDS-4-ALU Profile Ref: B1718



TEST-74 Profile Ref: W4507



LIPOD Profile Ref: B5554



SILER Profile

PDS-ZM Profile

Ref: B7696

Ref: B9325



3035-O Profile Ref: B8441



PDS-ZM-PLUS Profile Ref: C2056



GIZA-DUO-LL Profile Ref: C2162



Ref: C2627



LIPOD-50 Profile Ref: C2609



MICRO-ALU Profile Ref: B1888




REGULOR Profile Ref: B468+43




Ref: W4508



Profile Ref: C1263



4050 Profile Ref: 18050



TAPO Profile Ref: C1919










GLAZA-LL Profile






MICRO-PLUS Profile Ref: C2966



RELATED PRODUCTS

ACCESSORIES

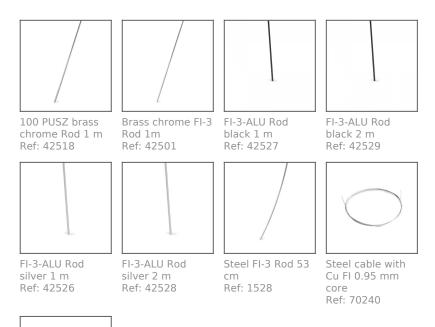



Steel wire FI-1 1m Ref: 1397