

PRODUCT DESCRIPTION

Standard fastener for light-weight fixtures, designed for the PDS-O profile. It is inserted into the profile through a pre-drilled hole. Power is supplied through a hole inside the fastener. One current pole is powered from one fastener that is equipped with a LONGITUDINAL Hole for the FI-3 ROD, which acts as a power conductor

Fill empty fields

Product nr.

Fixture type

Company


Job name

Date



TECHNICAL SPECIFICATION


TECHNICAL DRAWING

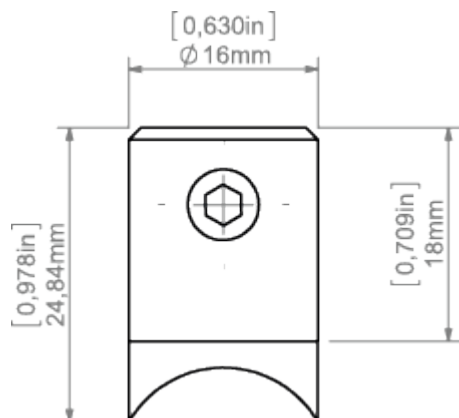

RELATED PROFILES



OLEK Profile
Ref: B8505



PDS-O Profile
Ref: B3777

RELATED PRODUCTS


ACCESSORIES




100 PUSZ brass
chrome Rod 1 m
Ref: 42518



Brass chrome FI-3
Rod 1m
Ref: 42501



FI-3-ALU Rod
black 1 m
Ref: 42527




FI-3-ALU Rod
black 2 m
Ref: 42529




FI-3-ALU Rod
silver 1 m
Ref: 42526



FI-3-ALU Rod
silver 2 m
Ref: 42528



Steel FI-3 Rod 53
cm
Ref: 1528



Steel cable with
Cu FI 0.95 mm
core
Ref: 70240



Steel wire FI-1 1m
Ref: 1397