

## PRODUCT DESCRIPTION

Standard fastener for light-weight fixtures, designed for the PDS-O profile. It is inserted into the profile through a pre-drilled hole. Power is supplied outside the fastener to a power connector. One current pole is powered from one fastener that is equipped with a LONGITUDINAL Hole for the FI-3 ROD, which acts as a power conductor

Fill empty fields

Product nr.

Fixture type

Company


Job name

Date



## TECHNICAL SPECIFICATION


## TECHNICAL DRAWING

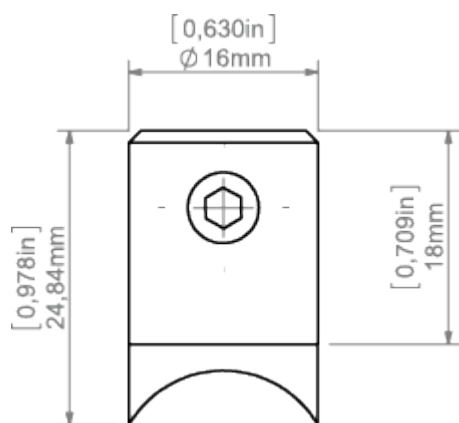

RELATED PROFILES




OLEK Profile  
Ref: B8505




PDS-O Profile  
Ref: B3777

## RELATED PRODUCTS


## ACCESSORIES




100 PUSZ brass  
chrome Rod 1 m  
Ref: 42518



Brass chrome FI-3  
Rod 1m  
Ref: 42501



FI-3-ALU Rod  
black 1 m  
Ref: 42527




FI-3-ALU Rod  
black 2 m  
Ref: 42529




FI-3-ALU Rod  
silver 1 m  
Ref: 42526



FI-3-ALU Rod  
silver 2 m  
Ref: 42528



Steel FI-3 Rod 53  
cm  
Ref: 1528



Steel wire FI-1 1m  
Ref: 1397