

STD Series Specification


DRF6

24V-8mm





【General description】

- Reel to reel process, no soldering joint.
- Light line and free with big emitting angle.
- 4 optional 2700K/3000K/4000K/6500K.
- suit for furniture lighting and decorative lighting application.

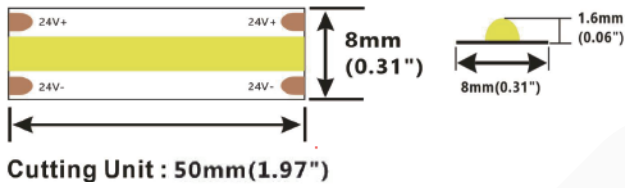

【Dimension】


- Input voltage: DC24V
 CRI: >90
 Max.power: 8W(1m)
 Power range: 6.4~8W(1m)
 Rated current: 0.3A(1m) 1.31A(5m)
 Typical Power: 7.2W(1m) 31.5W(5m)
 tape IP: IP20/IP65/IP67
 On-off times: 10000 (test times)
 Warranty: 3years (Warranty is based on indoor use)
- Max.length: 5000mm(16.4')
 Cutting unit: 50mm(1.97")
 LED pitch: /
 Min. bend diameter: Φ 60mm(2.36")
 Mounting: 3M tape
 Copper foil: 2oz





【Photo-electric Parameters】

CRI	Color	CCT	Lumen(lm/m)	Lumen(lm/ft)	lm/W	ErP 2019
Ra>90	SW	2700K	605	185	84	G
Ra>90	WW	3000K	605	185	84	G
Ra>90	NW	4000K	675	206	94	F
Ra>90	W	6500K	720	220	100	F



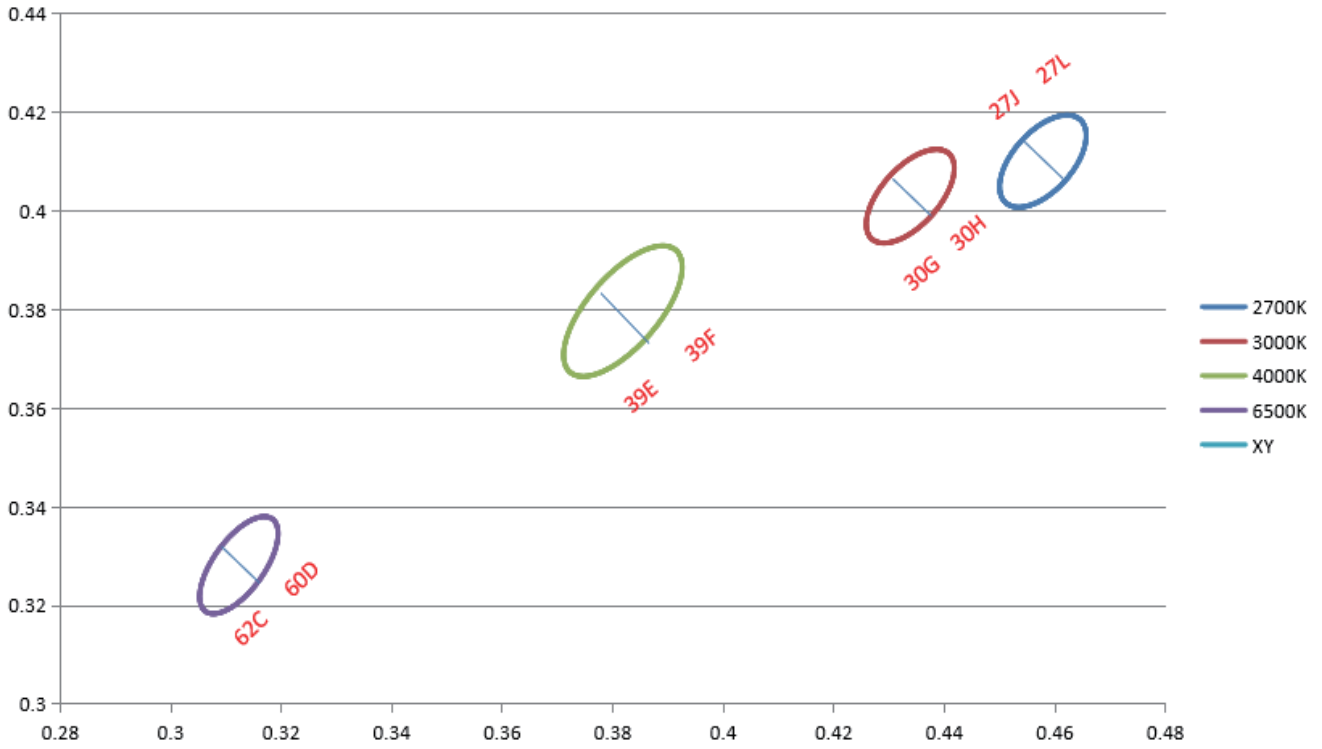

- 1.The tolerance of output data can be vary up to 15%.
- 2.the output data tested according to IES TM-30-15.
- 3.the output data is based on IP20/Imertex, data of 5m in only for reference.
- 4.IP protection process leads changes to size, CCT and luminous flux.

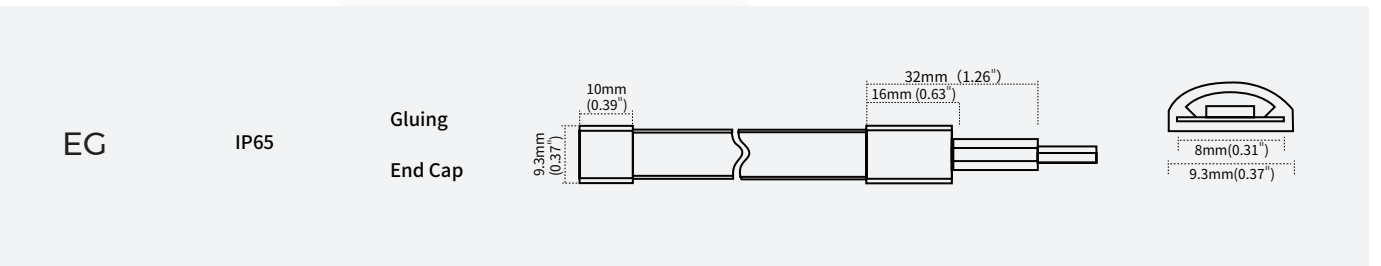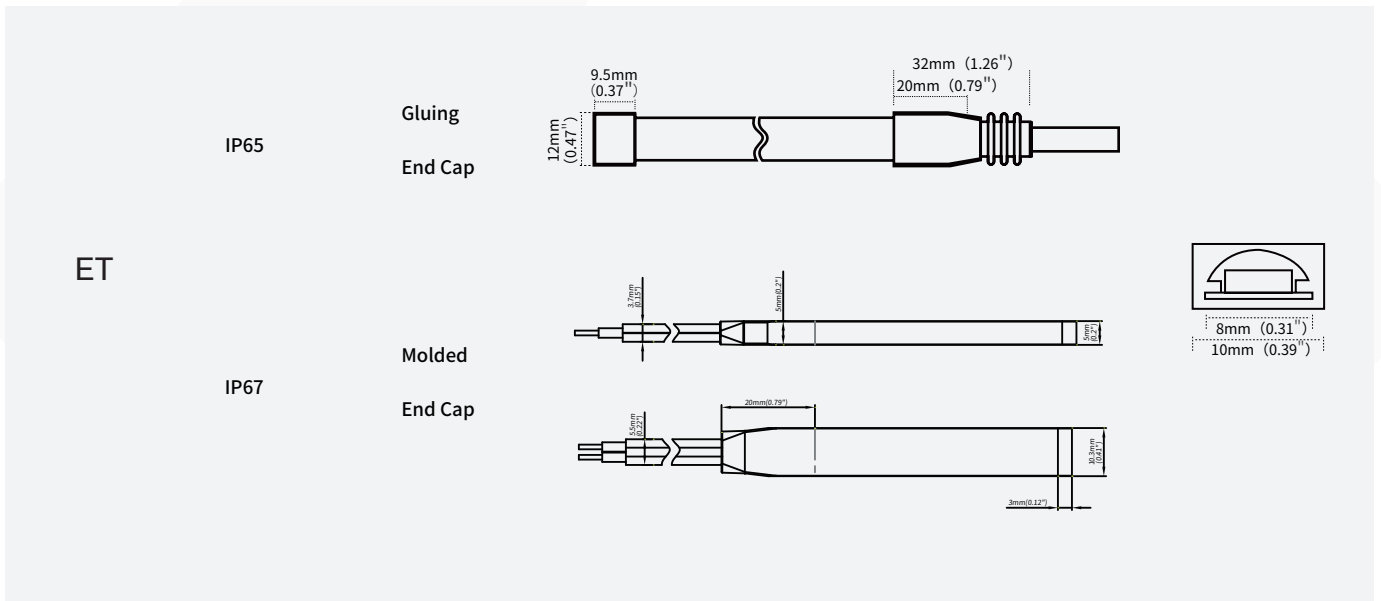













[IP process information]



【Electronic & output data】

IP Process	Picture	Picture description	Size	optional CCT/color for finished product	lumen output rate
NO	 NO/IP20	No proof	8mm*1.6mm	2700K/3000K/4000K/6500K	100%
NA	 NANO/IP65	Nano-proof	8mm*1.6mm	2700K/3000K/4000K/6500K	98%
ET	 ET/IP67	Extrusion curved tube	10mm*4.8mm	2700K/3000K/4000K/6500K	88%
EG	 EG/IP65	Extrusion tube	9.3mm*3.8mm	2700K/3000K/4000K/6500K	88%

【Accessories Information】

Name	Picture	Code	Coding	description
Slim connector		94-03-00-0064	TBB208-NOTA	Suitable for 8mm board width, IP20, 2PIN board-to-board solderless terminal
Slim connector		94-03-00-0066	TXB208-NOTA012	Suitable for 8mm board width, IP20, 2PIN wire- to-board solderless terminal
Fixed Clip		94-02-00-0002	FSW08SA	Silicone clip, screw: PA 3*8mm, suitable for 8mm FPC,EF/ET strip
Silicone end cap set		94-02-00-0044	DT08EA-A	Silicone cap with hole&without hole, suitable for 8mmFPC, ET waterproof LED strip
Silicone end cap set		94-02-00-0045	DW08EA-A	Silicone end cap with hole&without hole, suitable for 8mmFPC, ET waterproof LED strip
Mounting groove		94-02-00-0024	CVT08EA-12100100	Transparent PVC mounting groove,suitable for 8mm FPC,silicone extruded EF/ET strip
Stopper glue		94-1 6-0301 0001	AS-PG-0003	Silicone gel,suitable for ET/EF/EG waterproof LED strip
ET solderless plug		94-03-00-0027	PT208-ETWA	Monochromatic light strip, 8mm board width, ET protection technology
ET press-fit terminals		94-03-00-0028	CBX208-ETWA020	Monochromatic light strip, 8mm board width, ET protection technology
ET press-fit terminal kit		94-03-00-0029	STBX208-ETWA020	Monochromatic light strip, 8mm board width, ET protection technology
Gas phase rubber plug		94-02-00-0038	DT08EG-A	Translucent gas phase adhesive plug, suitable for 8mm wide silicone extrusion EG lamp with
Gas phase gel plugging		94-02-00-0039	DW08EG-A	Translucent gas phase adhesive plug, suitable for 8mm wide silicone extrusion EG lamp with end plug

【Packing】

Colors brand package



General customized package



IP Process	Product size(mm)	Product quantity (m/reel)	Product quantity (m/case)	Product net weight(kg)	Net weight per box(kg)	Gross weight(kg)	Package size (cm)
NO	5000*8*1.6	5	350	0.12	8.4	9.48	41*41*26
NA	5000*8*1.6	5	350	0.13	9.1	10.27	41*41*26
ET	5000*10*4.8	5	200	0.4	16.0	18.4	41*41*26
EG	5000*9.3*3.8	5	200	0.19	7.6	8.74	41*41*26


Remark: data with 10% tolerance

· Engineering packaging of NO(IP20)/NA(IP65).



· Engineering packaging of EG(IP65)/ET(IP67)

(free-soldering end caps with 40 cover per box could be ordered separately if needed)

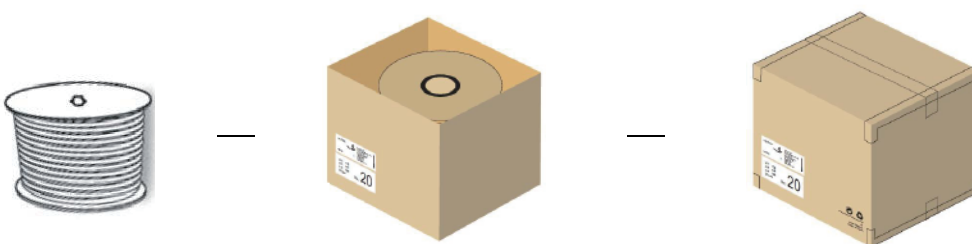

IP Process	Product size(mm)	Product quantity (m/reel)	Product quantity (m/case)	Product net weight(kg)	Net weight per box(kg)	Gross weight(kg)	Package size (cm)
NO	50000*8*1.6	50	650	1	13	14.9	41*41*26
NA	50000*8*1.6	50	650	1.1	13.1	15	41*41*26
ET	50000*10*4.8	50	100	4.5	9	10.35	25.5 *25.5*26
EG	50000*9.3*3.8	50	100	1.9	3.8	4.37	25.5 *25.5*26

Remark: data with 10% tolerance

【Precautions】

- Please drive the led strip with 24VDC isolated power, and the ripple of the constant voltage source should be less than 5%.
- DO NOT twist the strip, especially the emitting point, in case damage of LED chip.
- ATTENTION, there are 2 soldering parts per reel (5m/reel) at most when mass production, just for few reels.
- Please do not bend the strip into an arc with a diameter less than 30mm to ensure the longevity and reliability.
- Do not fold it in case any damage of LED chip.
- Do not pull the power wire hard to ensure the longevity. Any Crash may damage the LED light is prohibited.
- Please make sure the wire is connected to the anode and cathode correctly. The power output should be consistent with the voltage of the strip to avoid damage.
- LED lights should be stored in dry, sealed environment. Please only unpack it before usage. Ambient temperature: -25℃~40℃. Storage temperature: 0℃~60℃. Please use the strips without waterproof within indoor environment with humidity less than 70%.
- Please be careful during operation. Do not touch the AC power supply in case of electric shock.
- Please leave at least 20% power for the power supply during using to ensure there is enough power supply to drive the product.
- Do not use any acid or alkaline adhesives to fix the product (e.g.: glass cement).
- Do not scratch the product when IP process of the product is NA. Ultraviolet rays will damage the nano-layers on the product and seriously affect the life of the product.