

PRODUCT DESCRIPTION

- Designed to reach an IP67 waterproof rating
- Simple design and functionality

FINISH:	
Silver anodized	
*Custom colors available upon	request
	Fill empty fields



Product nr.

Fixture type

Company

Job name

Date

TECHNICAL SPECIFICATION

Application

- for surface mounting in existing furniture, built-ins, etc.

Assembly

- using screws properly selected for the mounting surface and placed under the LED strip
- on the mounting strip mounted to the surface with properly selected screws

Additional information

- possibility of making a linear fixture with IP67 protection, which means the fixture is dustproof and waterproof
- the profile fits dedicated mounting strips
- space for LED strip: 12.2 mm

Profile bending with covers: HS-12, K-12

Minimum internal radius	Minimum external radius
200 mm	250 mm


- minimum radius bending radius which when exceeded causes destruction (deformation, bending or lack of compatibility with other accessories, e.g. covers, end caps, etc.) of the profile
- internal radius refers to the profile bent so that the cover is facing the inside of the arch
- external radius refers to the profile bent so that the cover is facing the outside of the arch
- irregular curves are possible after consultation and individual quotation
- when bending anodized profiles, one should be aware of cracking of the anode coating (which may be more or less visible depending on the radius)



AVAILABLE LENGTHS

Ref. nr.	surface finish	available lengths
B4369ANODA_1	Silver anodized	1000 mm
B4369ANODA_2	Silver anodized	2000 mm
B4369ANODA_3	Silver anodized	3000 mm

TECHNICAL DRAWING





RELATED PROFILES







TEST-36 Profile Ref: B6639



TEST-74 Profile Ref: W4507



RELATED PRODUCTS


COVERS



HS-12 clear Cover Ref: 00158 110°



HS-12 frosted Cover Ref: 00157 110°



KA-12 clear Cover Ref: 17079



KA-12 frosted Cover Ref: 17078





KA-PRO-12 clear Cover Ref: 17067



KA-PRO-12 frosted Cover Ref: 17066 110°





END CAPS



STOS-ALU grey End cap Ref: 00085



STOS-ALU metalized End cap Ref: 24065

ACCESSORIES



6x1,2 Gland Ref: 00802




PDS Spring Ref: 00800



TEKNIK Latch Ref: 24003



LED TAPES

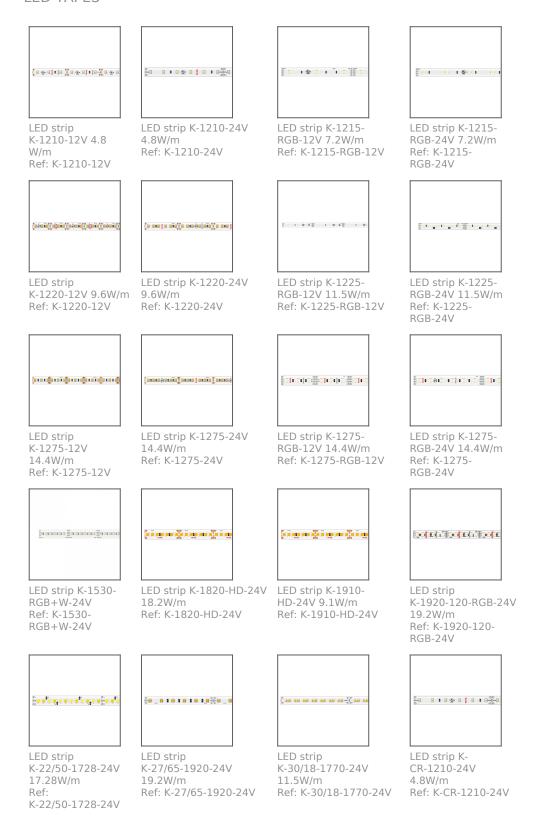





MARKETING MATERIALS

Taśma LED K-CR-1910-

Ref: K-CR-1910-HD-24V

HD-24V 9.1W/m

Taśma LED WP-

K-1220-12V 9.6W/m

Ref: WP-K-1220-12V

Taśma LED K-

18.2W/m Ref: K-CR-1820-HD-24V

CR-1820-HD-24V









Presentation set 1 Ref: 90051