


Cover HR-ALU

Ref. B17206M

Ref. arch 0945

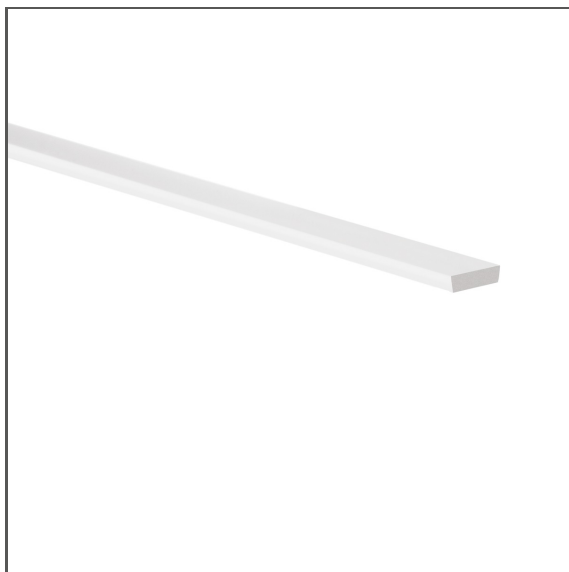

- For the construction of sealed lighting fixtures

APPLICATION

- LED protection and light diffusion in lighting fixtures

MOUNTING

- to the profile, by pressing

ADDITIONAL INFORMATION

- ATTENTION! rigid cover, not intended for bending or deformation
- standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

TECHNICAL DRAWING



TECHNICAL SPECIFICATIONS

Color	<input type="checkbox"/> frosted
Material	PC
Shape	flat
Maximum length on request	3000 mm
Light transmission	47 %
Width	15 mm
High mechanical resistance	yes
UV resistance	yes

Length	Ref
1000 mm	B17206M_1 0945_1
2005 mm	B17206M_2 0945_2
3010 mm	B17206M_3 0945_3

Cover HR-ALU

Ref. B17206M

Ref. arch 0945

RELATED PROFILES > FOR FLOORS



HR-ALU

A01889

Ref. arch B1889