


Cover HS-12

Ref. B17201M, B17201T

Ref. arch 00157, 00158

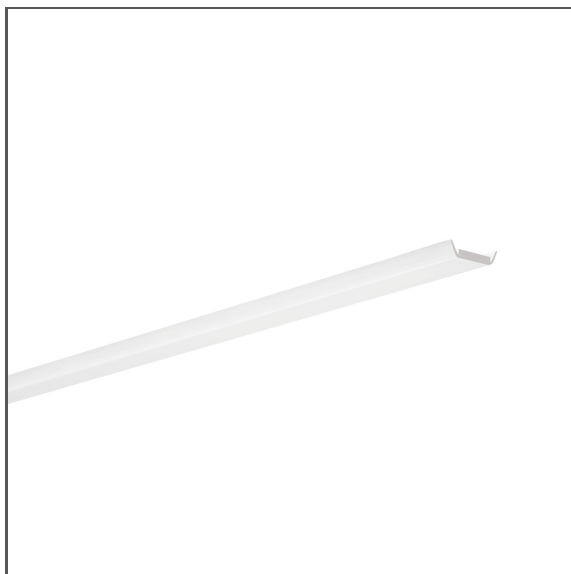

- Recommended for the construction of sealed lighting fixtures

APPLICATION

- LED protection and light diffusion in lighting fixtures


MOUNTING

- to the profile, by pressing

ADDITIONAL INFORMATION

- standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

TECHNICAL DRAWING



TECHNICAL SPECIFICATIONS


| | | | | | |
|---------------------------|---------|-----------|---------|--------------------|----------------------|
| Material | PC | Color | Length | Light transmission | Ref |
| Shape | flat | ☐ frosted | 1000 mm | 73 % | B17201M_1 00157_1 |
| Maximum length on request | 3000 mm | | 2005 mm | | B17201M_2 00157_2 |
| Width | 14.8 mm | | 3010 mm | | B17201M_3 00157_3 |
| UV resistance | yes | ▨ clear | 1000 mm | 94 % | B17201T_1 00158_1 |
| | | | 2005 mm | | B17201T_2 00158_2 |
| | | | 3010 mm | | B17201T_3 00158_3 |

Cover HS-12

Ref. B17201M, B17201T

Ref. arch 00157, 00158


RELATED PROFILES > FOR MAIN LIGHTING



TRIADA

A04476
Ref. arch B4476

RELATED PROFILES > UNIVERSAL



PAC-ALU

A04370
Ref. arch B4370



STOS-ALU

A04369
Ref. arch B4369