



Cover LIGER-45

Ref. B17086S, B17086B

Ref. arch 17086, 17089

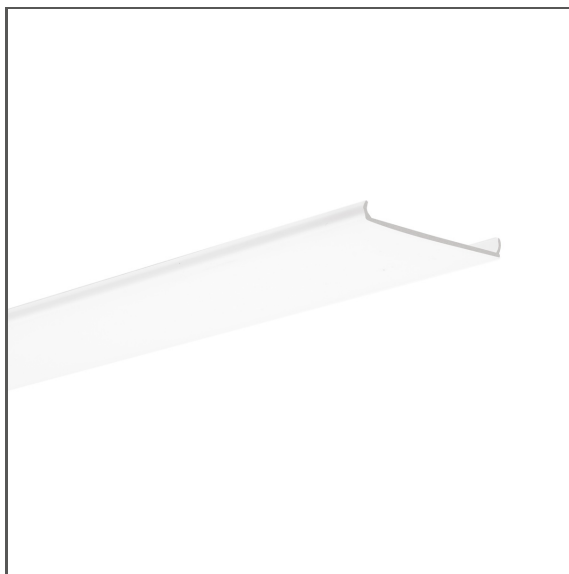

- Perfectly diffuses light

APPLICATION

- LED protection and light diffusion in lighting fixtures


MOUNTING

- to the profile, by pressing

ADDITIONAL INFORMATION

- standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

TECHNICAL DRAWING



TECHNICAL SPECIFICATIONS

Material	PC
Shape	flat
Maximum length on request	10000 mm
Width	45 mm
Possibility of obtaining a line of light	yes
Possibility of twisting	yes
Possibility of bending	yes


Finish	Light transmission	Length	Ref
satin	70 %	1000 mm	B17086S_1 17086_1
		2005 mm	B17086S_2 17086_2
		3010 mm	B17086S_3 17086_3
		10000 mm	B17086S_10 17086_10
satin	70 %	10000 mm	B17086MOP_10 17086OP_10
black	31 %	1000 mm	B17086B_1 17089_1
		2005 mm	B17086B_2 17089_2
		3010 mm	B17086B_3 17089_3

Cover LIGER-45

Ref. B17086S, B17086B

Ref. arch 17086, 17089

RELATED PROFILES > FOR MAIN LIGHTING




KOZEL-50
A00757
Ref. arch C0757



KOZUS-50
A00958
Ref. arch C0958



LARKO-50
A00756
Ref. arch C0756



LIPOD-50
A02609
Ref. arch C2609